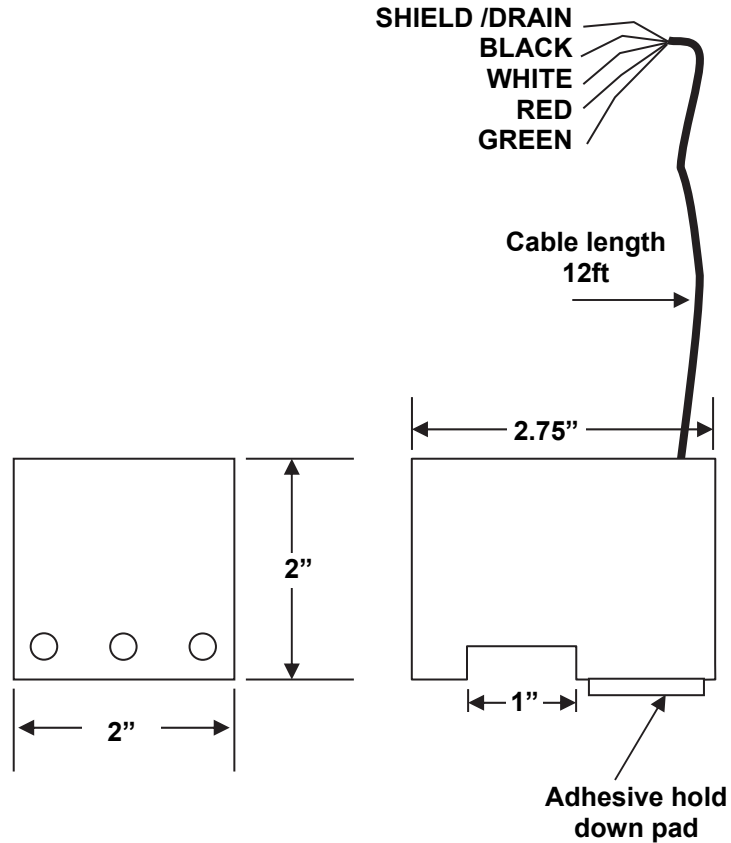
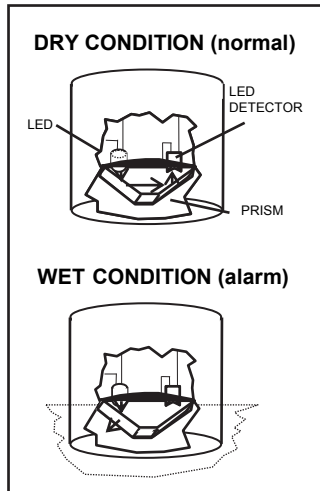


Liquid Optic Sensor Designed to Trigger with $\cong 0.75''$ of Oil or Water.

PRINCIPLES OF OPERATION**SPECIFICATIONS****OPERATING TEMPERATURE**

-40° to +140° F

POWER

2 VDC @ 13 mA

WEIGHT

1/2 pound

RESPONSE TIME

Immediate

PRINCIPLES OF OPERATION

Liquids (ex: fuel, water) - Photo optic

Dry Condition - Normally closed light beam

Alarm Condition - Opens (refracts) normally closed light beam

SENSOR CABLE

Shielded 22 AWG UL-E118830 CM

Maximum length 2000 feet